

QTC 1050 CEILING SPEAKER

Quest Engineering QTC range of flush mounted 100v ceiling speakers have been built in two versions, either with a back can or without. All speakers are Co-Axial for improved intelligibility and offer excellent intelligibility. All speakers in the range are of a 'fast fit' nature, featuring white metal grills.

The QTC 1050 is a true co axial ceiling speaker with built-in 70v/100v transformer.

The built-in 5" + 1" coaxial speaker driver is designed of wide frequency response of 80-20kHz, the multiple power taps are of 0.75, 1.5W, 3W & 6W. The metal grille and ABS baffle are painted in attractive RAL9016 white color.

Features

- Metal Grill
- Quick Mount via screw out tags
- 2.2 mF capacitor fitted
- 5 inch and 1.5 inch tweeter for superior speech intelligibility



Specifications


Type:	5" +1" tweeter
Speaker Type:	Coaxial
Rated Power:	10w
Speaker tapings:	6w, 3w, 1.5w, .65w, .75w
Line Voltage:	100/70V
Sensitivity:	88dB
Freq. Response:	80Hz-20KHz
Hole size:	185mm
Weight:	0.6Kg



Q-Tech Commercial Series

QTC 1050 CEILING SPEAKER


Frequency response @1W/1m

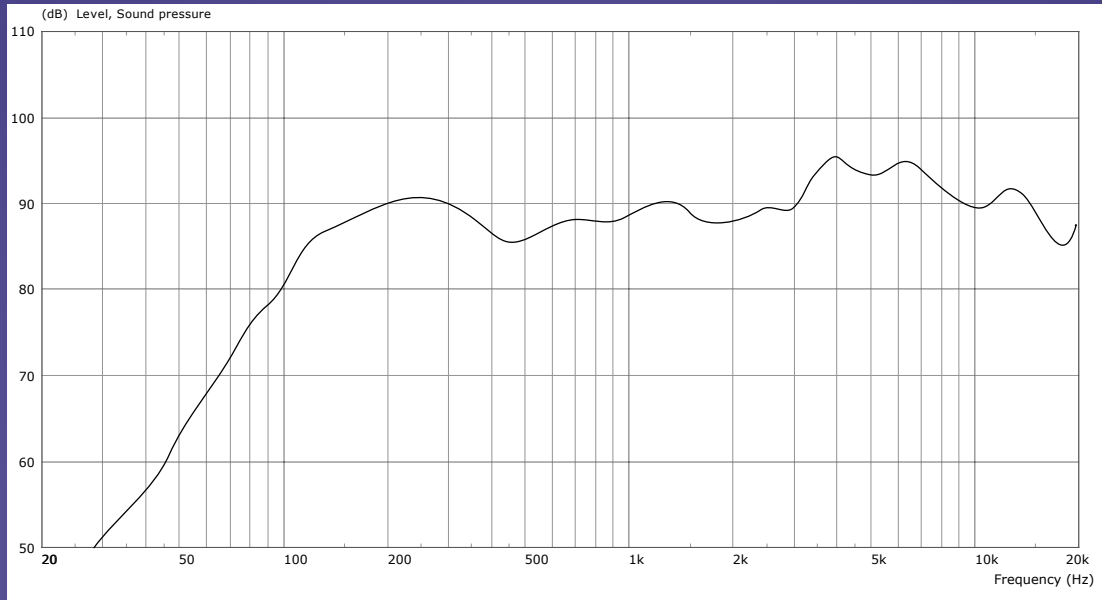

Sensitivity = 88dB (1m @ 1kHz)

With assumed frequency response in the lower end (dependent of mounting)

Directivity

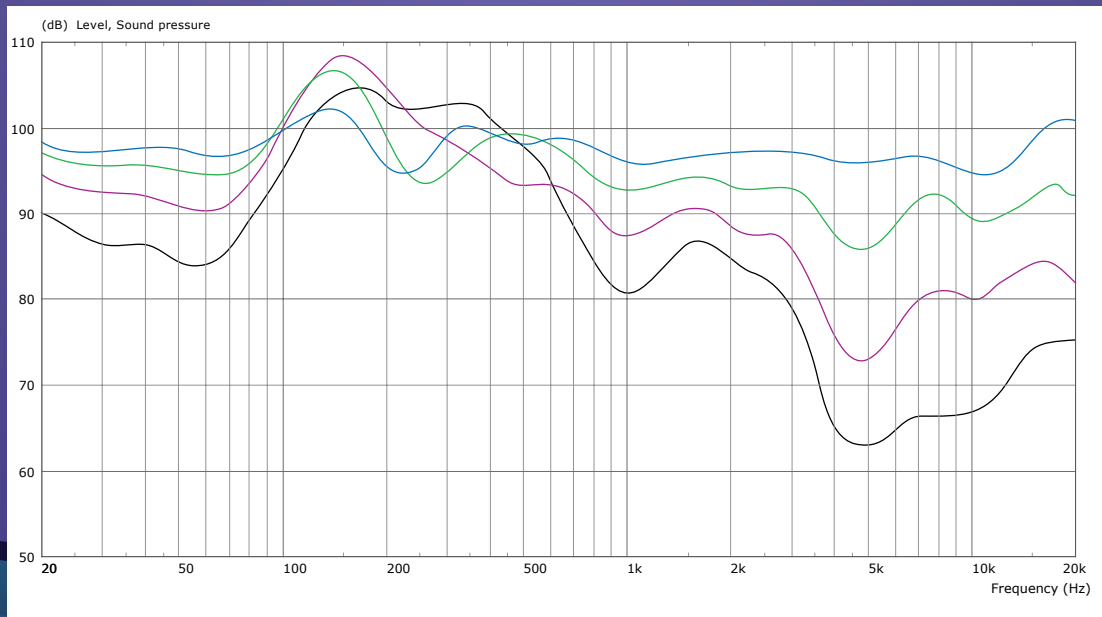

Frequency responses differences (referenced to on-axis response)

Blue = 15° | Green = 30° | Purple = 45° | Black = 60°



Q-Tech Commercial Series



86 Derby St. Pascoe Vale VIC 3055 | +613 9354 9133

www.questaudio.net | info@questaudio.net